

ANYWAVES

CONTROL MATERIAL TO MASTER WAVES


Ceramic 3D printed GNSS L1/E1 Bands Antenna

Rx

Hemispherical coverage

HPBW = 90°

Size < 1U

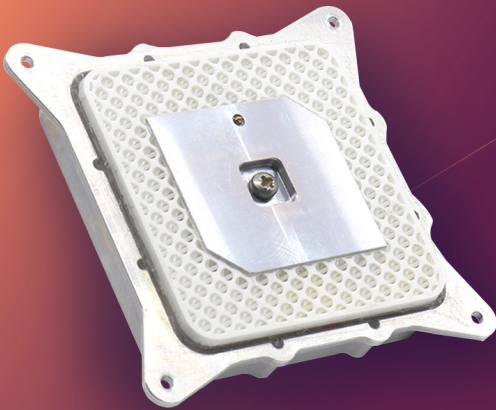

Benefits

- **Acceptance Tests** (RF, Mechanical, Thermal) included :
 - Return loss
 - Z-axis random vibration
 - Thermal cycling
- ITAR Free

ANYWAVES, the only pure European space antenna equipment manufacturer, provides high-performance and high-quality antennas for satellite constellations.

ANYWAVES GNSS L1/E1 Bands antenna has TRL 8 and brings together a unique technology of 3D printing and robustness of ceramic material within a very compact volume.

This antenna features excellent radiation characteristics within a compact and sleek design. It can withstand harsh environment without radome thanks to material selection and solderless feed system.



ANYWAVES
2, Esplanade Compans Caffarelli - Bât. Toulouse 2000 Hall D
31000 Toulouse, France
+33 (0)5 31 54 41 56
anywaves.eu

Waiver : Fact and figures herein are for information only and do not represent any warranty of any kind



Ceramic 3D printed GNSS L1/E1 Bands Antenna




Rx

Hemispherical coverage

HPBW = 90°

Size < 1U

Simulated RF Performance

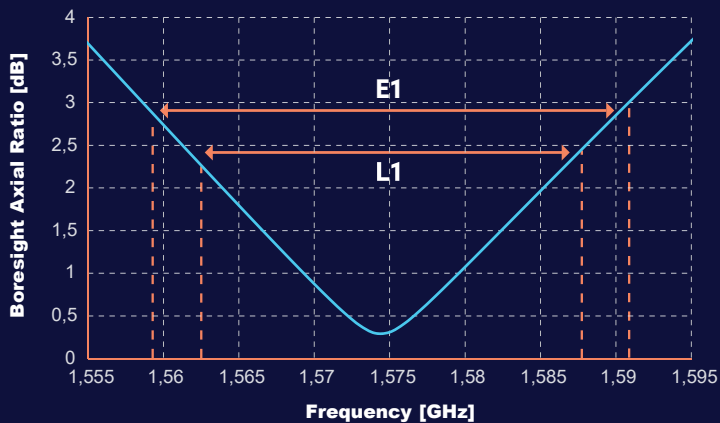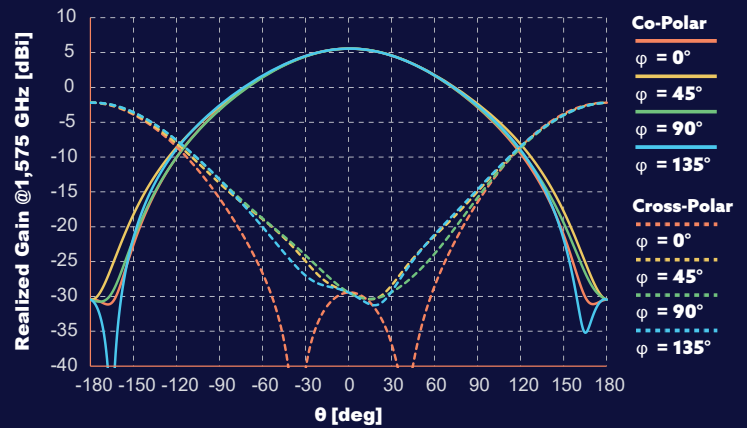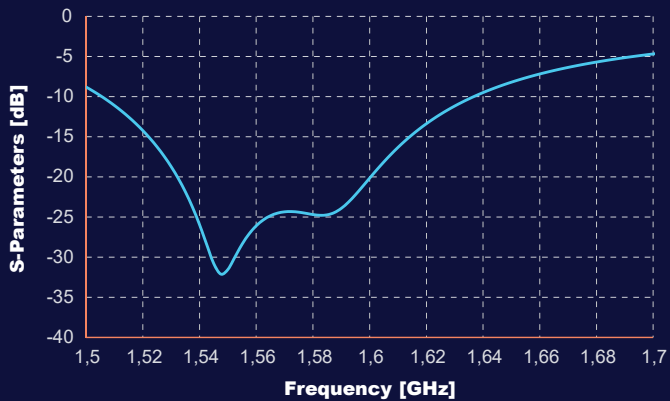

Typical performance

Central frequency	1.575 GHz
Bandwidth	L1 : 1.563 - 1.587 GHz E1 : 1.559 - 1.591 GHz
Realized gain	> 5.5 dBi at boresight > 4.3 dBi at ± 30° > 1.1 dBi at ± 60°
Half Power Beam Width	± 45° over bandwidth
Axial Ratio	< 3 dB from 0° to ± 40° (all planes) < 5 dB from 0° to ± 80° (all planes) < 8 dB from 0° to ± 90° (all planes)
Reflection coefficient	< -10 dB
Polarization	Right Hand Circular Polarization
Efficiency	> 95 %

Physical characteristics

Envelope size without connector	L 68 x W 70 x H 12.2 mm ³ Protruding height: 4.5 mm
Mass with connector	86 ± 2 g
Operational temperature	-150°C / + 150°C
Connector	Coaxial SMA female (50 Ω)
Mechanical interface	4 x M3 (unthreaded hole)
Acceptance Tests	Performed on Flight Models only